

COMPANY PROFILE

Chengkong Electronics, Professional data collection product supplier.

More than ten years of ingenious quality assurance
and first-class data collection services



Product Categories

I

Analog input module

II

Analog output module

III

AC input module

IV

Weighing module

V

TC/RTD temperature acquisition module

VI

Analog input and output module

VII

Switching/digital module

VIII

Develop custom modules

IX

signal isolator

X

Interface conversion module

Application areas



Automation equipment



Medical electronics



Smart manufacturing



Remote monitoring




Industrial control



Smart warehousing



Instruments anemometer

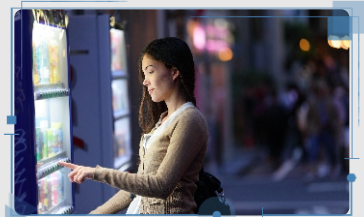

new retail



The quality of 品质自然出众
 材质与众不同 深圳市诚控电子有限公司
 DIFFERENT



Switching input and output modules

Overview

CK module is a new generation of modular data logger based on embedded system. It adopts standard DIN35 rail installation method, which is easy to install and flexible to use. It can cope with various field applications. The module is equipped with Ethernet communication and isolated RS485. It can communicate with PC or PLC alone, or communicate with PC or PLC with multiple 485 interfaces at the same time, or form a network with multiple 485 modules.

CK-5161E switch quantity/digital quantity input data collector can collect 16 switch quantity signals (optical coupler input); suitable for collecting various IO signals in industrial sites. Suitable for collecting various IO signals in industrial sites.

CK-5161E adopts optoelectronic isolation technology, which effectively guarantees data collection reliable and safe.

Technical Parameters

- ◆ Embedded Real-Time Operating System
- ◆ Input and output channels: 16 inputs
- ◆ Input Type: Optocoupler
- ◆ Output type: NPN mos/relay
- ◆ Communication: Ethernet RS485 communication
- ◆ Wide power range: DC 9~30V
- ◆ Scope of supply: DC 12V or +24V
- ◆ Address / baud rate configurable by user
- ◆ Protocol: Modbus-TCP/Modbus-RTU
- ◆ ESD protection: ±15KV
- ◆ Power consumption: <1W
- ◆ Isolated Withstand Voltage: DC 2500V
- ◆ Operating Temperature Range: -30℃ ~ 70℃
- ◆ Industrial-grade plastic housing, standard DIN35 rail mounting

Application

- Automation equipment
- Remote monitoring and data collection
- Intelligent manufacturing/smart factory
- Industrial site control
- Smart warehousing and monitoring
- Medical and industrial control product development
- Packaging and material transfer
- Electronic product manufacturing

Function Configuration

model	CK-5161E	CK-5009E	CK-5162E	CK-5162R
DI (光耦)	16		16	16
DO (NPN)			16	16
DO (MOSFET)		8		
Ethernet	support	support	support	unsupport
RS485	support	support	support	support

Contents

1 CK-5161E Module Introduction	5
1.1 Switching data acquisition	5
1.2 Input and output isolation	5
1.4 Surge protection.....	5
2 Technical indicators	5
2.1 Switch input.....	5
2.2 Switching output	5
3 Port Information	6
3.1 CK-5161E Port Arrangement	6
3.2 CK-5161E Port Description	6
4 communication	7
4.1 Communication interface	7
4.1.1 RS485 Connection.....	7
4.2 Module communication mode	7
4.2.1 Master-slave mode.....	7
4.3 Communication parameters	8
4.3.1 Mailing address	8
4.4 Communication speed rate	8
4.5 Communication Protocol.....	8
4.5.1 MODBUS-RTU Protocol.....	8
4.5.2 CK module MODBUS address allocation	9
5 Electrical parameters	9
5.1 Module parameters.....	9
6 Mechanical specifications	10
6.1 Mechanical Dimensions	10
7 Installation Method	10
8 Three guarantees and maintenance instructions	10
9 Disclaimer	10
9.1 copyright	10
10 Product display picture	11
11 Wiring Diagram	12
11.1 CK-5161E wiring diagram	12

CK-5161E 16ch Switch input
CK-5009E 8ch Switch output
CK-5162E 16ch Switch input/output

Input Type: Optocoupler, active low
 Output: RS485 modbus-RTU/modbus-TCP

CK-5161E is a switch/digital input data collector that can be configured with 16 switch/digital inputs. It is suitable for collecting various switch signals and outputting switch control signals from industrial sites.

Switching Data Acquisition

CK-5161E adopts advanced data processing technology, which can collect various active and passive switch/digital signals in industrial sites. It can meet the high measurement requirements of industrial sites, security, smart buildings, smart homes, power monitoring, process control and other occasions.



Input/Output Isolation

The product is designed for industrial applications: through DC-DC conversion, the measurement circuit and the main control circuit power supply are isolated; at the same time, the control unit and signal acquisition are electrically isolated using photoelectric isolation technology, effectively ensuring reliable and safe data acquisition.


surge protection

The module is equipped with a transient suppression circuit that can effectively suppress various surge pulses and protect the module to work reliably in harsh environments.


Technical indicators

Switch input

- ◆ Number of input channels: up to 16
- ◆ Input type: optocoupler, low level effective
- ◆ Input equivalent circuit:

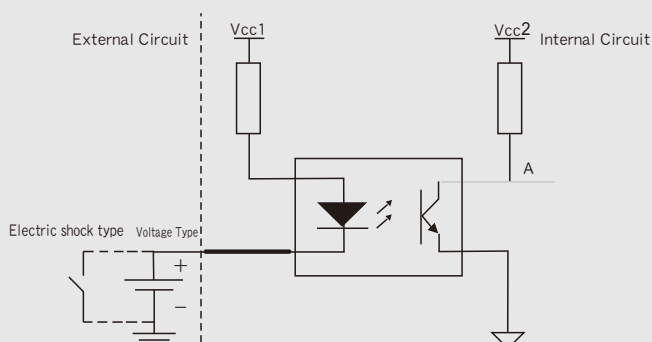

Port Information

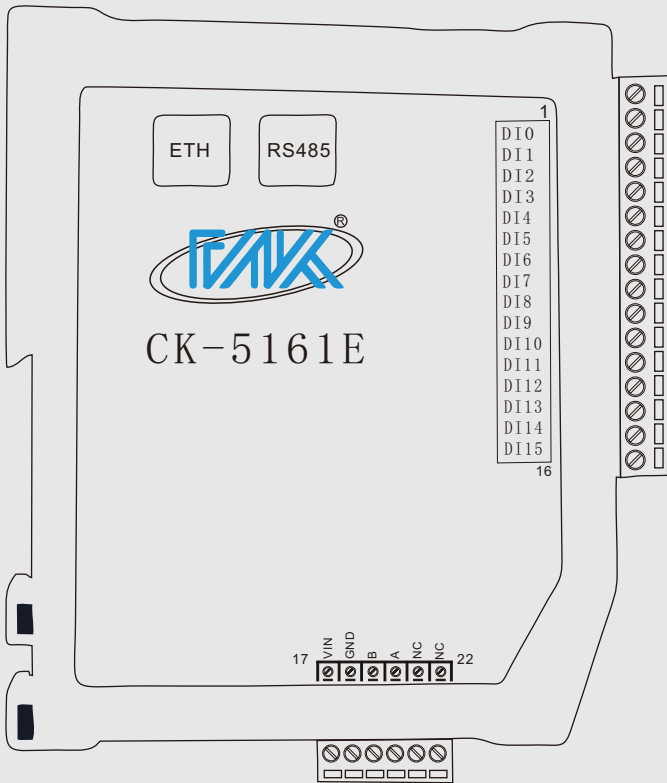

CK-5161E Port Description


Port	Port ID	Port Function
1	D00	Switching/digital output channel 0
2	D01	Switching/digital output channel 1
3	D02	Switching/digital output channel 2
4	D03	Switching/digital output channel 3
5	D04	Switching/digital output channel 4
6	D05	Switching/digital output channel 5
7	D06	Switching/digital output channel 6
8	D07	Switching/digital output channel 7
9	D08	Switching/digital output channel 8
10	D09	Switching/digital output channel 9
11	D010	Switching/digital output channel 10
12	DO11	Switching/digital output channel 11
13	DO12	Switching/digital output channel 12
14	DO13	Switching/digital output channel 13
15	DO14	Switching/digital output channel 14
16	DO15	Switching/digital output channel 15
17	VIN	Power input positive terminal
18	GND	Power Ground
19	B	485 signal negative input terminal
20	A	485 signal positive input terminal
21	NC	Null Port

Communication interface

Ethernet Connection

Some modules of the CK series support 100M/10M standard Ethernet interface. Support Modbus TCP protocol and support automatic polarity identification (AUTO MDIX) of the network port.


CK series modules support standard RS485 interface (see the figure below)

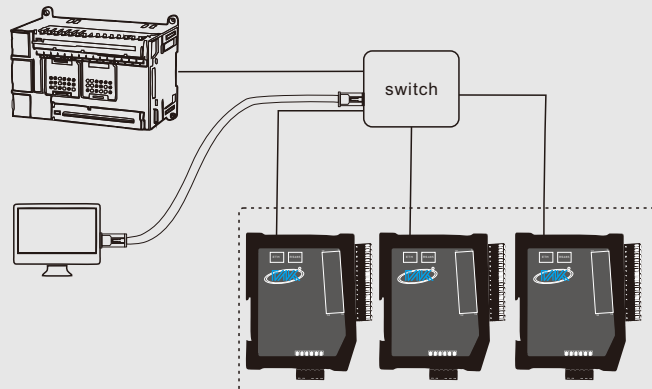

CK module network connection diagram through Ethernet interface device

RS485 Connection

The RS485 interface of the CK series module is a standard RS485 interface, which adopts differential signal logic. The logic "1" is represented by a voltage difference of $+(2\sim6)V$ between the two lines; the logic "0" is represented by a voltage difference of $-(2\sim6)V$ between the two lines. The network connection of RS485 devices is very simple. You only need to connect the positive and negative ends of the device to the bus. When the communication distance is long, you should pay special attention to the network topology. The RS485 network topology generally adopts a terminal matching bus structure, and does not support ring or star networks. The lead-out length from the bus to each node should be as short as possible to minimize the impact of the reflected signal in the lead-out line on the bus signal. For more detailed information, please refer to the relevant information

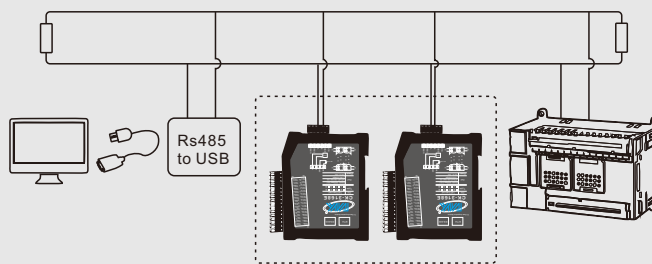


Schematic diagram of the module connecting to other devices via RS485 interface

Module communication mode

Master-slave mode

The communication mode of CK-5161E module is usually master-slave mode (one question and one answer mode); the host sends commands to the module through the communication interface, and the module responds accordingly after receiving the correct command.

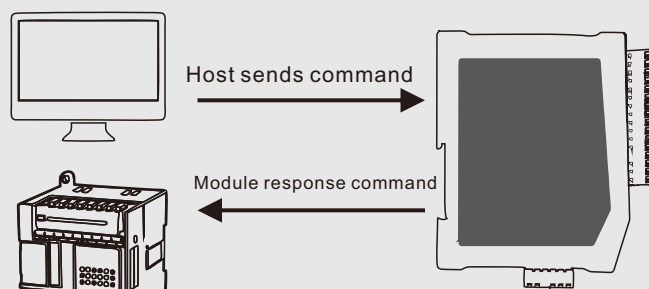

Master-slave mode

Serial communication parameters (default 9600 8,N,1 address 01)

Mailing address

The communication address range of the CK-5161E module is 01~F7 (1~247), and the module address is factory set to 01; the module communication address can be modified by the user through commands according to site needs. For specific methods, please refer to the corresponding commands.

Communication Protocol

MODBUS-TCP/MODBUS-RTU protocol

Modbus protocol is a universal communication protocol that has been widely used in today's industrial control field. Through this protocol, controllers can communicate with each other or with other devices via a network (such as Ethernet).

The MODBUS address allocation of CK module is as follows: (CK-5161E)

Bit operation register description:

Bit operation function code: 01H (read multi-channel output switch status), 02H (read multi-channel input switch status), 05H (set single-channel switch output status), 0FH (set multi-channel switch output status)

Order (HEX)	Register address (HEX)	Data Description
02	0	Read digital input 0 status
02	1	Read digital input 1 status
02	2	Read digital input 2 status
02	3	Read digital input 3 status
02	4	Read digital input 4 status
02	5	Read digital input 5 status
02	6	Read digital input 6 status
02	7	Read digital input 7 status
02	8	Read digital input 8 status
02	9	Read digital input 9 status
02	A	Read digital input 10 status
02	B	Read digital input 11 status
02	C	Read digital input 12 status
02	D	Read digital input 13 status
02	E	Read digital input 14 status
02	F	Read digital input 15 status
01/05/0F	0	Read and write DO output 0 output status (write 1 load to get power)

Communication rate

CK-5161E module RS485 supports baud rates: 1200bps, 2400bps, 4800bps, 9600bps, 19200bps, 38400bps, 57600bps, 115200bps; the module communication rate can be modified by the user through commands according to site needs, and the specific method is to refer to the corresponding command.

The CK-5161E module supports the industrial standard MODBUS-RTU (RS485) protocol. The module works in the MODBUS slave (server) state. It can communicate with PLCs, RTUs or computers of various brands. The module supports MODBUS commands as shown in the figure:

Serial number	Order(HEX)	Function	Remark
1	01	Read single/multi-channel switch output status (bit)	Output Channel
2	02	Read single/multi-channel switch input status (bit)	Input Channels
3	03	Read switch status (byte)	Input and output channels
4	05	Set the single-channel switch output status (bit)	Output Channel
5	06	Write switch output status (byte)	Output Channel
6	0F	Set the multi-channel switch output status (bit)	Output Channel

01,02,05,0F Bitwise operation allows users to read and write one or more consecutive input and output channels at a time;

03, 06, 10 are byte-based operations. Users can read and write up to 16 input and output channels at a time.

Order (HEX)	Register address (HEX)	Data Description
01/05/0F	1	Read and write DO output 1 output status (write 1 load is powered)
01/05/0F	2	Read and write DO output 2 output status (write 1 load is powered)
01/05/0F	3	Read and write DO output 3 output status (write 1 load is powered)
01/05/0F	4	Read and write DO output 4 output status (write 1 load is powered)
01/05/0F	5	Read and write DO output 5 output status (write 1 load is powered)
01/05/0F	6	Read and write DO output 6 output status (write 1 load is powered)
01/05/0F	7	Read and write DO output 7 output status (write 1 load is powered)
01/05/0F	8	Read and write DO output 8 output status (write 1 load is powered)
01/05/0F	9	Read and write DO output 9 output status (write 1 load is powered)
01/05/0F	A	Read and write DO output 10 output status (write 1 load is powered)
01/05/0F	B	Read and write DO output 11 output status (write 1 load is powered)
01/05/0F	C	Read and write DO output 12 output status (write 1 load is powered)
01/05/0F	D	Read and write DO output 13 output status (write 1 load is powered)
01/05/0F	E	Read and write DO output 14 output status (write 1 load is powered)
01/05/0F	F	Read and write DO output 15 output status (write 1 load is powered)
03/06/10	20	Read and write switch output status 0~15 channels, (bit 0 represents channel 0)
03	22	Read switch input status 0~15 channels, (bit 0 indicates channel 0)

Modbus commands supported by DI acquisition modules:

Serial number	Order(HEX)	Function	Remark
1	02	Read digital/switch input	

The Modbus address allocation of DI type acquisition module is as follows:

Order (HEX)	Register address(HEX)	Corresponding PLC address (DEC)	Data Description
02	0000	10001	Digital/switch channel 0 input status ^(III)
02	0001	10002	Digital/switch channel 1 input status
02	0002	10003	Digital/switch channel 2 input status
02	0003	10004	Digital/switch channel 3 input status

(III) The total number of channels varies depending on the module model.

Modbus RTU communication example of DI type acquisition module:

Example	Read DI input status																																				
Module Description	Number of channels: 8, address: 1																																				
Master sends	01 02 00 00 00 08 79 CC																																				
Module Reply	01 02 01 21 61 90																																				
The main station sends analysis	<p>01:Module slave address</p> <p>02: Modbus RTU Read input discrete quantity function code</p> <p>00 00:0x0000 Register start address</p> <p>00 08:Read register quantity 79 CC:CRCCheck digit</p>																																				
Module reply analysis	<p>01:Module slave address</p> <p>02: Modbus RTU Read input discrete quantity function code</p> <p>01:Number of data bytes</p> <p>21:Input status data, the binary corresponding to 0x21 is 0B00100001.</p> <table border="1"> <thead> <tr> <th></th> <th>Bit7</th> <th>Bit6</th> <th>Bit5</th> <th>Bit4</th> <th>Bit3</th> <th>Bit2</th> <th>Bit1</th> <th>Bit0</th> </tr> </thead> <tbody> <tr> <td>Reading Data</td> <td>0</td> <td>0</td> <td>1</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>1</td> </tr> <tr> <td>Channel Number</td> <td>7</td> <td>6</td> <td>5</td> <td>4</td> <td>3</td> <td>2</td> <td>1</td> <td>0</td> </tr> <tr> <td>Channel Status</td> <td>Low</td> <td>Low</td> <td>high</td> <td>Low</td> <td>Low</td> <td>Low</td> <td>Low</td> <td>high</td> </tr> </tbody> </table> <p>61 90:CRCCheck digit</p>		Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0	Reading Data	0	0	1	0	0	0	0	1	Channel Number	7	6	5	4	3	2	1	0	Channel Status	Low	Low	high	Low	Low	Low	Low	high
	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0																													
Reading Data	0	0	1	0	0	0	0	1																													
Channel Number	7	6	5	4	3	2	1	0																													
Channel Status	Low	Low	high	Low	Low	Low	Low	high																													



Electrical parameters

Unless otherwise specified, the electrical parameters of the CK-5161E data acquisition module are the values when Tamb=25°C.

Module parameters

参数	Parameter	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
供电电压	Power Supply	+9	---	+30	V
看门狗复位周期	Watchdog Period		1		S
输入保护	Input Protect		100/60		mA/V

Mechanical Dimensions

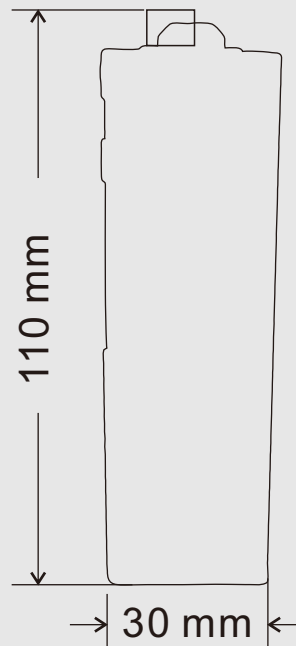
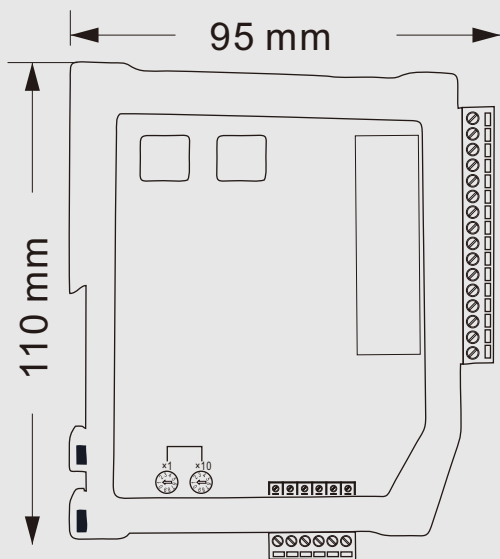


Installation method

CK-5161E supports DIN35 rail installation. Users can easily install or remove the module on the rail, providing assistance for industrial site application and installation.

Three guarantees and maintenance instructions

Within five years from the date of sale, if the product is damaged or the product quality is lower than the technical indicators under the conditions of storage, transportation and use, the user can return it to the factory for free repair. If the damage is caused by violation of operating regulations and requirements, the device fee and repair fee shall be paid.

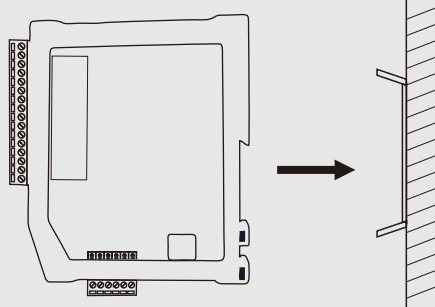

Disclaimer

Copyright

The copyright of the product text and related software described in this manual belongs to Shenzhen Chengkong Electronics Co., Ltd., and its property rights are absolutely protected by national laws. Without the authorization of our company, other companies, units, agents and individuals shall not illegally use and copy them, otherwise the company has the right to impose severe sanctions on national laws.

Product display picture



精工品质
独具匠心



Wiring Diagram

